

FUSED (WDM) WAVELENGTH DIVISION MULTIPLEXER: HIGH ISOLATION (1310/1550nm)

Specifications

Contact Ascentta with your custom specification needs.

Parameter		Unit	1310/1550
Operating Wavelength		nm	1310 and 1550
Operating Bandwidth		nm	±15
Isolation	Min	dB	32
Insertion Loss	Max	dB	0.4
PDL	Max	dB	0.10
Directivity	Min	dB	55
Optical Power Handling	Max	mW	300
Operating Temperature		°C	-40 to 85
Storage Temperature		°C	-40 to 85

* The above specifications are for parts without connectors. Adding connectors can affect the IL, & PDL.


* SOP=State Of Polarization

Packaging

Contact Ascentta with your custom configuration needs.

Parameter		250µm bare fiber	900µm loose tube	900µm/2mm/3mm loose tube
Configuration		1x2 or 2x2		
Dimension	mm mm	Φ3.0 x L40 Φ3.0 x L54	φ3.0 x L54 φ3.0 x L56	L90 x W20 x T10

Package Diagram

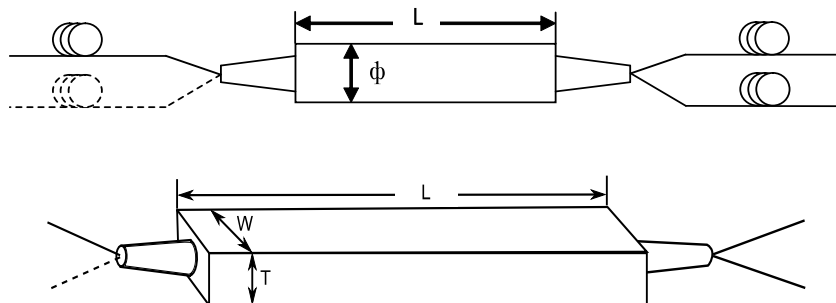

Contact Ascentta for all your custom design needs.

**FUSED (WDM) WAVELENGTH DIVISION MULTIPLEXER: HIGH ISOLATION
(1310/1550nm)**

Ordering Information

Contact Ascentta with your custom configuration needs.

WDMC	Wavelength	Ports	Package	Fiber Type	Cable Type	Fiber Length	Connector
WDMC	35=1310/1550	12=1x2 22=2x2	A40= Φ3.0 x L40 A54= Φ3.0 x L54 A56= φ3.0 x L56 C10=L90 × W20 × T10	S=SMF-28 fiber	B=250um L=900um W=2mm H=3mm	10= 1.0m 15=1.5m 20=2.0m	NE=None FA=FC/APC FC=FC/PC SA=SC/APC SC=SC/PC LC=LC/PC
	X=Others		X=Others	X=Others	X=Others	X=Others	X=Others

Contact Ascentta for all your custom design needs.